




Product Service

CERTIFICATE

No. Z2 099333 0096 Rev. 10

Holder of Certificate: **LONGi Green Energy Technology Co., Ltd.**
No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

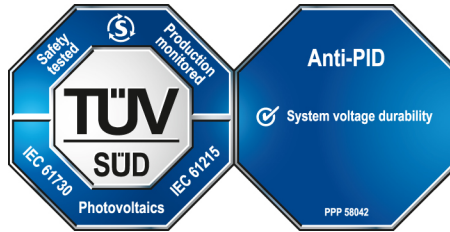

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704062103446-10

Valid until: 2029-05-28

Date, 2025-07-01


(Zhulin Zhang)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFIKAT ◆ CERTIFICATE

CERTIFICATE

No. Z2 099333 0096 Rev. 10

Model(s):

LR5-72HTH-xxxM (xxx=540-610, in step of 5, 144 cells)
 LR5-66HTH-xxxM (xxx=490-550, in step of 5, 132 cells)
 LR5-54HTH-xxxM (xxx=405-450, in step of 5, 108 cells)
 LR5-54HTB-xxxM (xxx=405-445, in step of 5, 108 cells)
 LR5-72HTHF-xxxM (xxx=540-610, in step of 5, 144 cells)
 LR5-72HPH-xxxM (xxx=525-575, in step of 5, 144 cells)
 LR5-66HPH-xxxM (xxx=480-530, in step of 5, 132 cells)
 LR5-60HPH-xxxM (xxx=435-480, in step of 5, 120 cells)
 LR5-54HPH-xxxM (xxx=400-435, in step of 5, 108 cells)
 LR5-72HIH-xxxM (xxx=525-575, in step of 5, 144 cells)
 LR5-66HIH-xxxM (xxx=480-530, in step of 5, 132 cells)
 LR5-60HIH-xxxM (xxx=435-480, in step of 5, 120 cells)
 LR5-54HIH-xxxM (xxx=400-435, in step of 5, 108 cells)
 LR7-72HTH-xxxM (xxx=590-655, in step of 5, 144 cells)
 LR7-54HTH-xxxM (xxx=445-475, in step of 5, 108 cells)
 LR5-36HTH-xxxM (xxx=260-290, in step of 5, 72 cells)
 LR7-60HTH-xxxM (xxx=495-525, in step of 5, 120 cells)
 LR7-66HTH-xxxM (xxx=550-580, in step of 5, 132 cells)
 LR5-54HTB-xxxM (xxx=400-420, in step of 5, 108 cells)
 LR7-54HTHF-xxxM (xxx=445-475, in step of 5, 108 cells)
 LR7-72HTHF-xxxM (xxx=590-655, in step of 5, 144 cells)
 LR7-60HTHF-xxxM (xxx=495-525, in step of 5, 120 cells)
 LR7-66HTHF-xxxM (xxx=550-580, in step of 5, 132 cells)
 LR7-72HTB-xxxM (xxx=595-650, in step of 5, 144 cells)
 LR7-66HTB-xxxM (xxx=545-595, in step of 5, 132 cells)
 LR7-60HTB-xxxM (xxx=495-545, in step of 5, 120 cells)
 LR7-54HTB-xxxM (xxx=450-485, in step of 5, 108 cells)
 LR7-72HVHF-xxxM (xxx=620-665, in step of 5, 144 cells)
 LR7-72HVH-xxxM (xxx=620-665, in step of 5, 144 cells)
 LR7-60HVHF-xxxM (xxx=535-560, in step of 5, 120 cells)
 LR7-60HVH-xxxM (xxx=535-560, in step of 5, 120 cells)
 LR7-54HVHF-xxxM (xxx=460-500, in step of 5, 108 cells)
 LR7-54HVH-xxxM (xxx=460-500, in step of 5, 108 cells)
 LR7-48HVH-xxxM (xxx=420-445, in step of 5, 96 cells)
 LR7-32HVH-xxxM (xxx=270-295, in step of 5, 64 cells)
 LR7-72HVB-xxxM (xxx=615-665, in step of 5, 144 cells)
 LR7-66HVB-xxxM (xxx=575-595, in step of 5, 132 cells)
 LR7-60HVB-xxxM (xxx=520-540, in step of 5, 120 cells)
 LR7-54HVB-xxxM (xxx=475-500, in step of 5, 108 cells)
 LR7-48HVB-xxxM (xxx=415-435, in step of 5, 96 cells)
 LR7-36HVB-xxxM (xxx=310-330, in step of 5, 72 cells)
 LR7-32HVB-xxxM (xxx=260-285, in step of 5, 64 cells)
 xxx stands for rated output power at STC.

Parameters:

Construction:	Framed, with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class C according to UL790
PID Test Condition:	Test method a of IEC TS 62804-1:2015, ±1500V DC, 192 hrs, 85 % RH, 85 °C.

Tested according to:

IEC 61215-1:2021
 IEC 61215-1-1:2021
 IEC 61215-2:2021
 IEC 61730-1:2023
 IEC 61730-2:2023
 PPP 58042B:2015